

3 Megapixel Professional Star Low-Lux Vandal Dome

VD-300Np Star

H.264 High Profile • 3MP/2MP Resolution supported @30fps



Photo Indication & Dimension Diagram





- Sony STARVIS 3M Vandal Dome Camera
- SmartFocus® Upgrade to Focus Rapidly and Remotely
- HDTV Video Quality (Full HD 3MP @ 30fps)
- Brickcom WDR Enhancement® Technology
- H.264, MJPEG and MPEG-4 Triple Codec Compression
- i-Mode for Different Environments
- Removable IR-cut Filter / Auto Light Sensor for Day and Night
- 1 DI/DO for External Alarm and Sensor Device
- TV-out Supported
- Two-way Audio
- P-Iris
- Built-in Micro SD / SDHC / SDXC Memory Card Slot for Local Storage
- IK10 Vandal-Proof and IP67 Weather-Proof Outdoor Enclosure
- Power over Ethernet/DC 12V/AC 24V Support
- Smart IR to Get a Better Illuminated Image



ONVIF

- | | |
|--|---|
| <ol style="list-style-type: none"> 1 RJ45 Connector
(For Ethernet, 802.3at PoE and 802.3af PoE) 2 Tilt Screw 3 Conduit Plug and Hole 4 IR LED 5 LENS 6 Reset Button 7 Terminal Block (For Audio in/out, DIDO) | <ol style="list-style-type: none"> 8 TV Out Connector 9 Terminal Block (For DC12V/AC24V) 10 Fan 11 Micro SD / SDHC / SDXC Card Slot Card Slot |
|--|---|

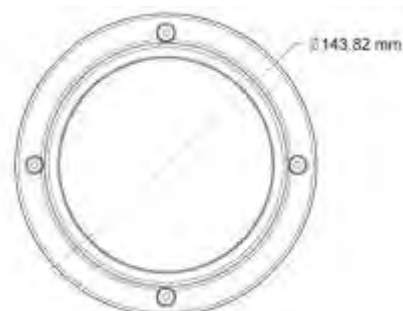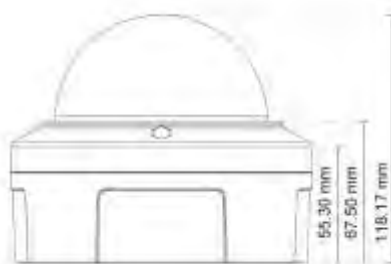

Camera	
Models	VD-300Np star
Hardware System	Flash: 32MB RAM: 256MB DDR
Image Sensor	Sensor Type : 1/2.8" Sony Exmor CMOS Sensor Sensor Resolution : 3MP (2048 x 1536)
Lens	Lens Type: Motorized Lens P-IRIS: F1.4 Focal Length: f=2.8~12mm View Angle: (H°/V°/D°) (H) 95°~33° / (V) 68°~24° / (D) 116°~41°
Local Storage	Built-in Micro SD/SDHC/SDXC Max.128G Memory Card Slot
Day & Night ICR	Triggered by Light sensor, Scheduling, Digital Input
Minimum Illumination	0 Lux(IR On, B/W) 0.0005Lux(F1.4,B/W) 0.0006Lux(F1.4,Color)
IR Illuminators	Built -In IR Illuminators, 60m (Visible distance) 25m (Detail distance) IR LED: 20 PCS
Video	
Compression Streaming	H.264 / MPEG4 / MJPEG Simultaneous multiple streams
Video Setting	i-Mode Scene Management: Smart Auto/ Indoor 60Hz/ Indoor 50Hz/ Outdoor / Car License Plate / Schedule/ Digital Input / Entrance & Elevator / Always i-Mode Profile Setting: Auto Exposure Control/Gain/ White Balance Control Manual Exposure Control: 1/120000s ~ 1s Manual Gain Control: 1~ 48
Image Resolution	3MP (2048 x 1536) ● (30fps) 2MP (1920 x 1080) ● (30fps)
WDR	D-WDR
TV Out	NTSC (30fps) / PAL (25fps)
Events and Alarm Management	
Events	Motion Detection/ Schedule/ Audio Detection/ Digital Input/ Temperature Alarm/ Auto IR Focus for Day & Night
Alarm	Stream/Snapshot to FTP/Email/Samba/SD-Card HTTP/Email Notification/ Digital Output

Audio	
Audio Streaming	2-way Audio Support
Audio Compression	G.711/AMR
Audio Input/ Output	Line input (Unbalanced, 1.4 Vp-p, 1 Vrms) / Line output
General	
Communication	Ethernet : one 10/100Mbps RJ-45 Supported Protocols : TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, HTTPS, Samba, PPPoE, UPnP, RTP, RTSP, RTCP, IPv4, IPv6, 802.1x
Power Input	DC12V 1A 802.3af PoE 802.3at PoE AC24V
Temperature/ Environment	Operating Temperature: -70°C ~ 60°C (-94°F ~ 140°F) Start-up Temperature: -40°C ~ 60°C (-40°F ~ 140°F) Operating Humidity: 10% ~ 90%
Max. Power Consumption	DC12V 1A 8 Watts AC 24V10.5 Watts 802.3 af PoE 10 Watts 802.3at PoE Plus 25 Watts
Dimension	143.82 (D) mm X 118.17(H) mm
Weight	860g/1.90lb
Housing	Weather-proof (IP67) Vandal-proof (IK10)
Certification	FCC/CE/IK10/IP67/UL/ECE R118
Viewing System Requirements	OS: Microsoft Windows 8/7/Vista/XP/2000 Browser: Mozilla Firefox, Internet Explorer 6/7 or above, Safari, Google Chrome Cell Phone: 3GPP player Real Player: 10.5 or above Quick Time: 6.6 or above VLC
Warranty	Limited 36 months warranty

Camera Accessories Options



L-WM-01v2
Camera Bracket



VD-B-ADAP
Camera Bracket



CI-802A
Camera bracket stand



PS-588I V3
9 port 10/100M PoE Fast Ethernet Switch



PS-7242IL-AT
24-port 10/ 100M High Power PoE+ Web Smart Ethernet Switch



POE30U V2
High Power PoE Injector